

22" LED FHD Monitor

MW3222-F



Key Features


- True color display
- Resolution is up to at 1920×1080
- Wide view of field:170°(H)/ 160°(V)
- Specific menu design, which is simple to operate
- Support 7*24 working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- Support multiply language

Specifications


| | |
|-----------------------|--|
| Model | MW3222-F |
| Display | |
| Display Type: | LED Backlight |
| Screen Size | 21.5" |
| Pixel Pitch(mm) | 0.248× 0.248 |
| Max Resolution | 1920×1080 |
| Brightness | 250 cd/m ² |
| Contrast | 1000:1 |
| Response Time | 5ms |
| color | 16.7M |
| Viewing Angle | Horizontal 170°, Vertical 160° |
| Interface | |
| VGA | 1 |
| HDMI | 1 |
| Audio In | 1 |
| Audio | |
| Audio Input | 1, 3.5 mm mini-jack |
| Speaker | 2x2W |
| OSD | |
| Multi- Language | 11 (English, French, German, Italian, Simplified Chinese, Traditional Chinese, Korean, Japanese, Espanola, Portuguese, Russian) |
| Mounting | |
| VESA | 100mm x 100mm |
| General | |
| Power supply | AC 100~240V, 50~60Hz |
| Consumption | <30 W(on) <0.5 W(Standby) |
| Operation Temperature | 5°C ~ 40 °C |
| Operating Humidity | 20%~80% (No Condensation) |
| Storage Temperature | -20°C ~ 60°C |
| Storage Humidity | 10%~85% (No Condensation) |
| Dimension (W×H×D) | 514.4 mm × 378.6 mm × 190mm |
| Weight: | Net Weight:3.4Kg Gross Weight:4.5Kg |
| Accessory | |
| Standard | HDMI cable, Power cable, Pedestal, Quick Guide |
| Optional | Hanging bracket |

Appearance

Dimensions

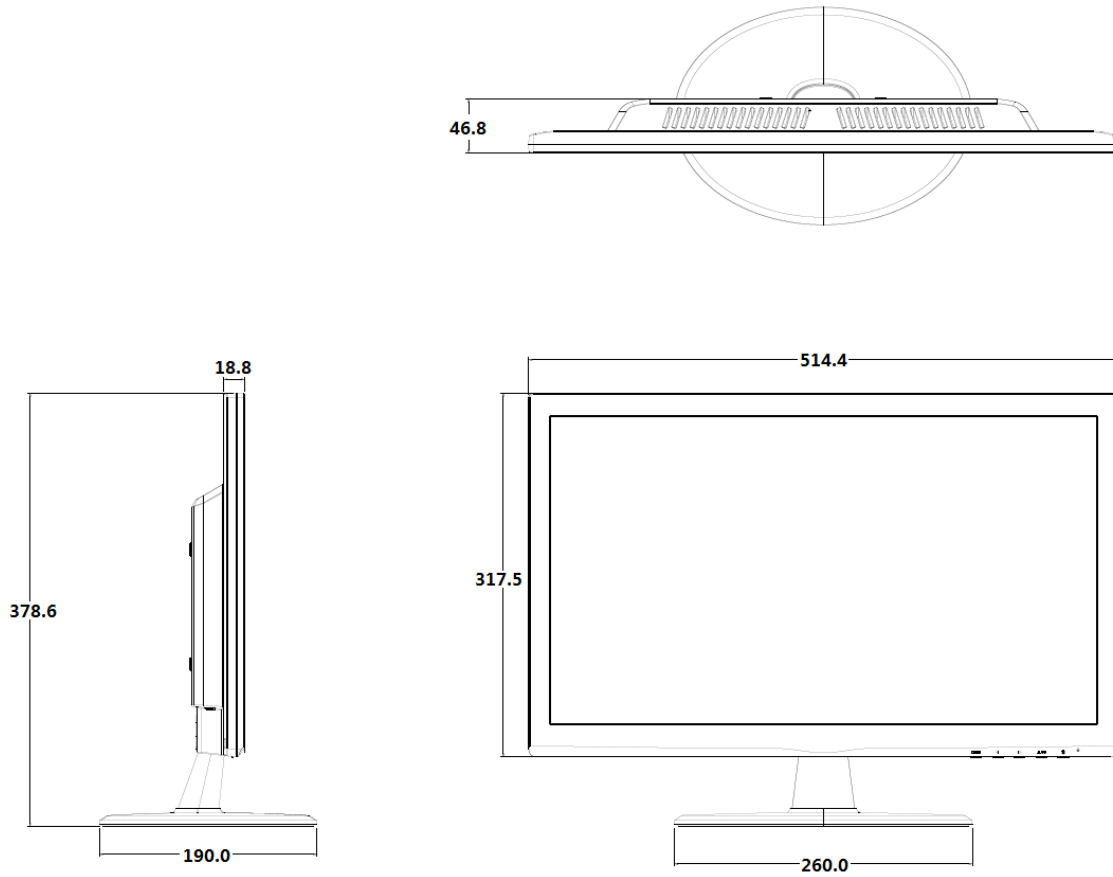

Interfaces

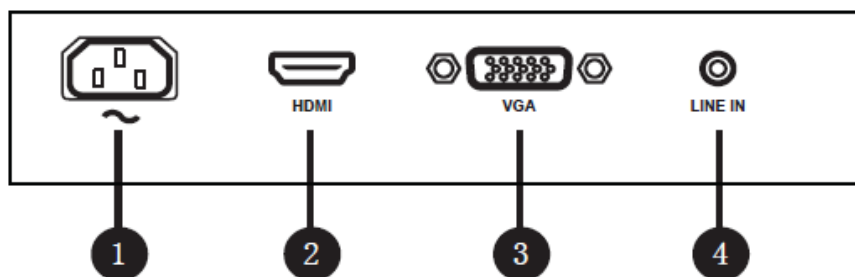

| | |
|-----------------|----------|
| ①AC power input | ②HDMI |
| ③VGA | ④LINE IN |

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2017 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.