


UNV HB-7199-CA USB HD Camera



Dimensions

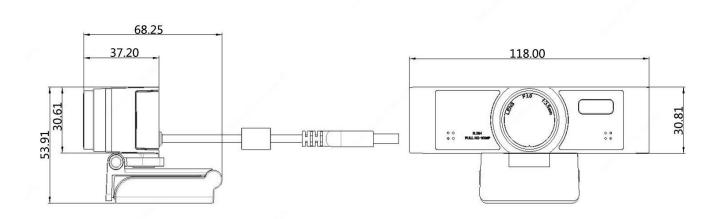

LENGTH:mm

Specifications

| Model | HB-7199-CA |
|----------------------|---|
| Image sensor | High quality CMOS sensor |
| Effective pixels | 2 megapixel |
| Video format | 1920x1080@30fps/1920x1080@25fps/1280x720@30fps/1280x720@25fps/960x540@ 30fps/960x540@25fps/640x360@30fps/640x360@25fps |
| Camera angle | Horizontal field angle:83° |
| Focal length | 3.2mm |
| Minimum illumination | 0.5Lux(F2.0, AGC ON) |
| Focus mode | Manual |
| Aperture | Fixed |



| Electronic shutter | 1/30s~1/10000s |
|-------------------------|--|
| White balance | Automatic, manual, specified color temperature |
| Digital noise reduction | 2D/3D |
| Backlight compensation | Support |
| Pickup distance | 6m |
| Pickup directivity | Omnidirectional |
| Interface type | USB 2.0 |
| Working voltage | 5V (USB powered) |
| Power | 1W |
| Dimension | 118mm(L)×37.2mm(W)×30.8mm(H) |
| Storage temperature | -40°C∼+60°C |
| Working temperature | 0°C ~+40°C |

Order Information

| Model | Remake |
|------------|------------|
| HB-7199-CA | USB Camera |

Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com;globalsupport@uniview.com

http://www.uniview.com

 $\hbox{@2020 Zhejiang Uniview Technologies Co.,} Ltd. \ All \ rights \ reserved.$

^{*} Product specifications and availability are subject to change without notice.